

3 Sides Lineal Brush Sander SL- 300-6SH (4 Top + 1 Right + 1 Left)



FEATURES OF THE MACHINE

The SL300-6H can be used for sanding or denibbing rails, architraves, skirtings and straight profiles. Different abrasives, speed and pressures can be used for a wide variety of applications or materials.

The main frame is fabricated of heavy steel plate and ribbed to minimize vibration and deflection.

All operating controls are centralized in a convenient control panel.


It can be used to sand architrave and molding for 3 sides
brushing head the speed ,adjust by inverter

Material hold down device


Material hold up& down adjustment by manual

Sanding head movement by manual

It's very easy and convenient to
replace the brush wear strip on the
hubs

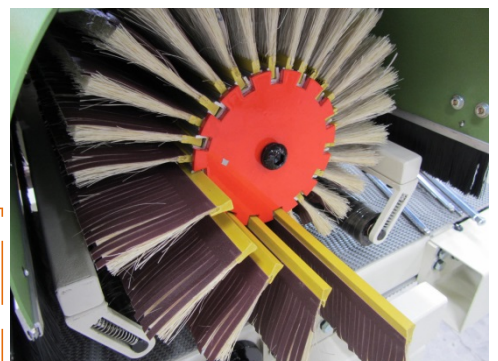

Model No.	SL-300-6SH
Max. working width	300mm
Min. Work-piece width	20mm
Max. working height	100mm
Min. Work-pieces length	400mm
Min. Work-pieces thinness	9.5mm
Feed speed (Variable)	2 – 12 m/min
Speed of Sanding Wheel	VFD / Inverter
4 Top Brush Head motor	4x 3HP (4 x 2.2KW)
Right & Left brushing head motor	2 x 1 HP (2 x 0.75KW)
Conveyor motor	1/2 HP (0.37KW)
Machine Dimension (D × W × H)	313cm × 178cm × 177cm
Packing Dimension (D × W × H)	314cm × 179cm × 193cm
Net weight	700 KGS
Gross weight	800 KGS

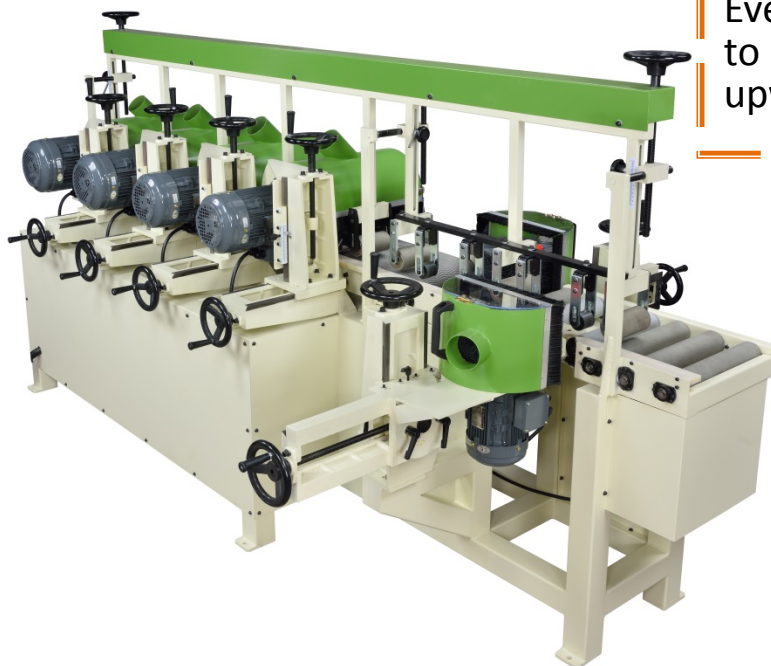

Every Sanding heads can adjust to Forward and backward , upward,down ,Tilt

Salida®