

MODEL SL-3213 Multi Spindle**Product Features :**

Fully adjustable fence system with easy to read scales in both inches and metric for quick setup and accurate boring.

Manually quick clamp devices.

Heavy-duty cast iron construction machined with precision.

Indexing pins to remain correct spindle alignment for resuming line boring operations in long workpiece.

Work stops on either end of the fence allow operator to line up work from the left to right for performing parallel boring patterns.

Adjustable depth stop control.

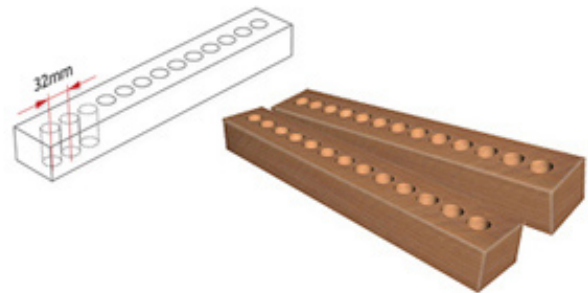
Optional motor specifications deliver fairly power and speed for multi hole boring even in the toughest workpiece.

Minimal maintenance required.

Optional multi axis bit set.

Open base steel stand included.

Sturdy density veneered plywood table top.

**Product Specifications :**

Model/Item No :	SL-3213
Motor Power :	1-1/2HP/ 1.12KW / 110V / 220V
Fence :	800mm (31.5")
Max. Boring Depth :	64mm (2.5")
Number of Spindle Heads :	13 (Left 6 + Right 7)
Table Size :	800 x 400mm (31.5" x 15.75")
Spindle Center :	32mm
Shank Diameter :	Ø10mm
Spindle Speed :	2800 R.P.M / 3450 R.P.M
Max. Depth (Bit to Fence) :	102mm (4")
Table Height from Floor :	848mm (33.38")
Machine Dimension (D x W x H) :	130cm x 190cm x 174.7cm
Packing Dimension (D x W x H) :	56cm x 88cm x 83cm
Net Weight :	82 KGS
Gross Weight :	97 KGS